


UNIlab

WORKSTATION



PICTURE SHOWS PRODUCT WITH OPTIONS

- Ready to operate workstation, incl. main antechamber and vacuum pump
- 2 glovebox sizes available
- PLC controlled with Siemens touch panel
- Automatic regenerable H₂O/O₂ single purifier unit
- Attainable purity <1 ppm H₂O, <1 ppm O₂
- Stainless steel encapsulated blower **MB- BL-01** with frequency converter
- Circulation capacity more than 84 m³/h (50 cfm) at ΔP = 60 mbar (60 Hz)
- World-wide operation using standard power supply
- Integrated high vacuum feedthroughs
- Conforms to CE
-  US LISTED

Technical Data

General Data

Product: Inert gas system UNILAB

Type: Glovebox with gas purification system


Size: Various sizes available, see page 5

System Control

Control unit: Programmable logic controller (PLC)

Operation: 5.7" monochrome touch panel with simulated multi-language operation elements for all glovebox components, foot pedal for box pressure adjustment

Electrical power: 230 V/50-60 Hz, 10 A or 115 V / 50-60 Hz, 20 A or 100 V/ 50-60 Hz, 20 A (power consumption may vary dependent on accessories)

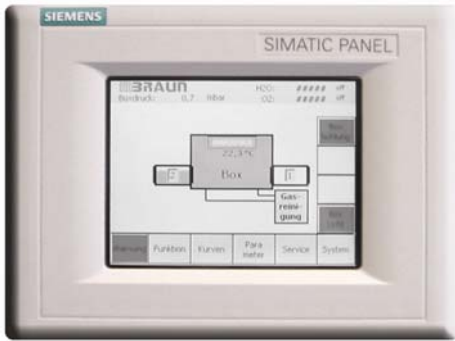

Touch Panel TP 177 mono

Gas Purification

Process

Gas circulation: Closed loop gas recirculation

Gas Purification System

Removal of H₂O and O₂

Working Gas

Inert gas: Nitrogen, Argon or Helium

Attainable Purity

H₂O < 1 ppm, O₂ < 1 ppm

Purifier

Amount / type: 1 H₂O / O₂ purifier column

Capacity: Oxygen removal: 30 l (standard conditions), moisture removal: 1700 g

Material: Stainless steel type 1.4301 (US type 304)

Heater: Integrated

Gas Purification

Regeneration

The purifier unit is regenerable

Procedure: Autom. regen. program (PLC controlled)

Regeneration gas: N₂/H₂ mixture (H₂ 3-5 %) or Ar/H₂ mixture (H₂ 3-5 %)

Cooling

Type: Water cooling 2-3 l/min* (water pressure 200-300 kPa) (in case of excess heat generation inside glovebox additional box integrated heat exchangers are available)

*Chiller ULK 1000 on request

Circulation Unit

Type: Integrated blower MB-BL-1 vacuum-tight, oil-free

Flow rate: 84 m³/h (50 cfm) at ΔP = 60 mbar (60 Hz)

Features: Operated with all standard power supplies; optimum system tuning by frequency pre-selection for the blower

Vacuum Pump

Type: Rotary vane pump*, oil mist filter, oil recirculation, automatic gas ballast control

Operation: 12 m³/h (10,9 cf/m at 60Hz), dual stage, ultimate vacuum < 3 x 10⁻² mbar

*Dry pump on request

Valves

Main valves: Electro-pneum. valves MB EPV-40 DN 40

Control valves: MB LogicSVB magnetic valve system, DN 4/8

Piping

Main piping: Copper pipe DN 40 KF system*



Control pipework: Copper pipe DN 4/10*

*Stainless Steel pipe 1.4301 (US type 304) on request

Integral Leak Rate

Less than 10⁻⁵ mbar l/s

Purifier Performance

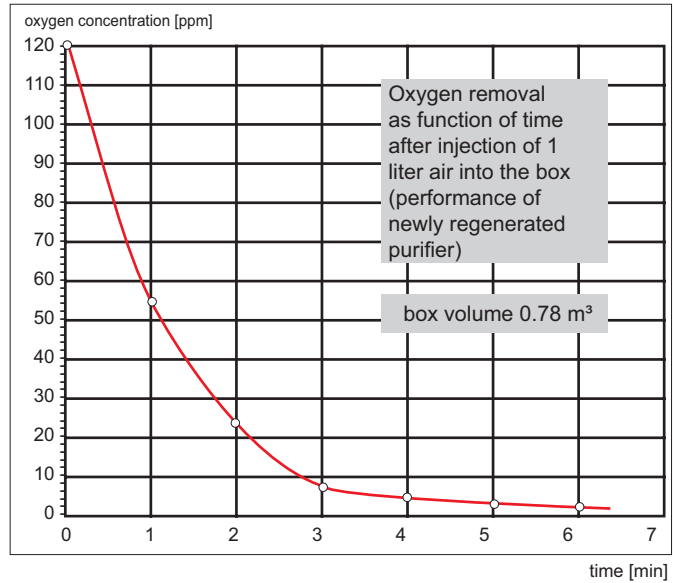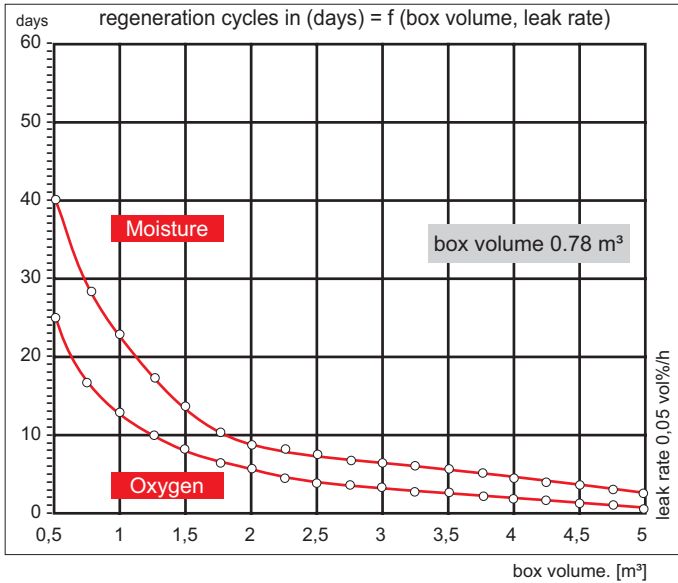

Glovebox

Type

Glovebox with bolted side panels

Material: Stainless steel 1.4301 (US type 304), thickness 3 mm

Inside surface: Brushed finish $R_a < 1 \mu\text{m}$ (DIN ISO 1302)

Outside surface: Coated, grey (RAL 7035)

Glovebox inside dimensions: width: 1200 mm / 1950 mm, height: 920 mm, depth: 780 mm

Feedthroughs

DN 40 KF: 2 pieces for customers usage (e.g. electrical feedthrough)

Electrical feedthrough: KF40 included (100, 110 or 230 V)

Dust Filter

MB-BF-L-03[®] 0.3 μm , class H 13, 1 gas inlet filter / 1 gas outlet filter

Shelves

3 shelves: Stainless steel 1.4301 (US type 304) height adjustable

Dimension: length: 1000 mm, depth: 220 mm

Box Windows

Inclined panel: Lexan thickness 10 mm*
*safety glass on request

Glovebox

Glove Ports

Type: POM (Polyoxymethylen) 220 mm dia., O-ring sealed

Gloves

Material: Butyl, thickness 0.4 mm*

*other sizes and materials on request

Box Light

Fluorescent lamp: Front mounted

Gas Purification System

Removal of H_2O and O_2

Working Gas

Inert gas: Nitrogen, Argon or Helium

Leak Rate According to ISO 10648-2 (Oxygen Method)

< 0.05 vol%/h typical (Class 1, measured at final acceptance test)

Leak Rate According to ISO 25412 (Press. Change Method)

< 0.05 vol%/h at negative pressure of 10 mbar at constant temp. (measured at final acceptance test)

Main Antechamber

Type

Cylindric type antechamber* 390 mm diameter, length 600 mm (inside dimensions)

Material: Stainless steel 1.4301 (US type 304), thickness 2.5 mm

Inside surface: Brushed finish

Outside surface: Coated, grey (RAL 7035)

*rectangular on request

Sliding Tray

Material: Stainless Steel 1.4301 (US type 304)

Doors

Material: Aluminum (AlMg3), anodized, thickness 10 mm

Door lock: Easy to operate spindle-lock with lifting mechanism

Pressure Gauge

Manometer: Analog display

Vacuum / Refill Process

Handling: Manual operation via hand valves

Main Antechamber Operation

Valves

Hand valves (DN 40 vacuum line / DN 8 refill line)

Leak Rate

$<10^{-5}$ mbar l/s


Basic System Configuration

- Glovebox with stand, incl. castors + leveling feet
- Main antechamber
- Gas purification system with vacuum pump RV12
- Shelves
- One piece electrical feedthrough

Optional Features


The system can be extended with the following optional components:

- Mini antechamber
- Rectangular antechamber
- H₂O/O₂-analyzer
- Refrigerator
- Solvent absorber
- Microscope equipment
- Automatic antechamber control
- Mechanical door locks
- Auto purge function
- Stainless steel piping
- Solvent purification systems

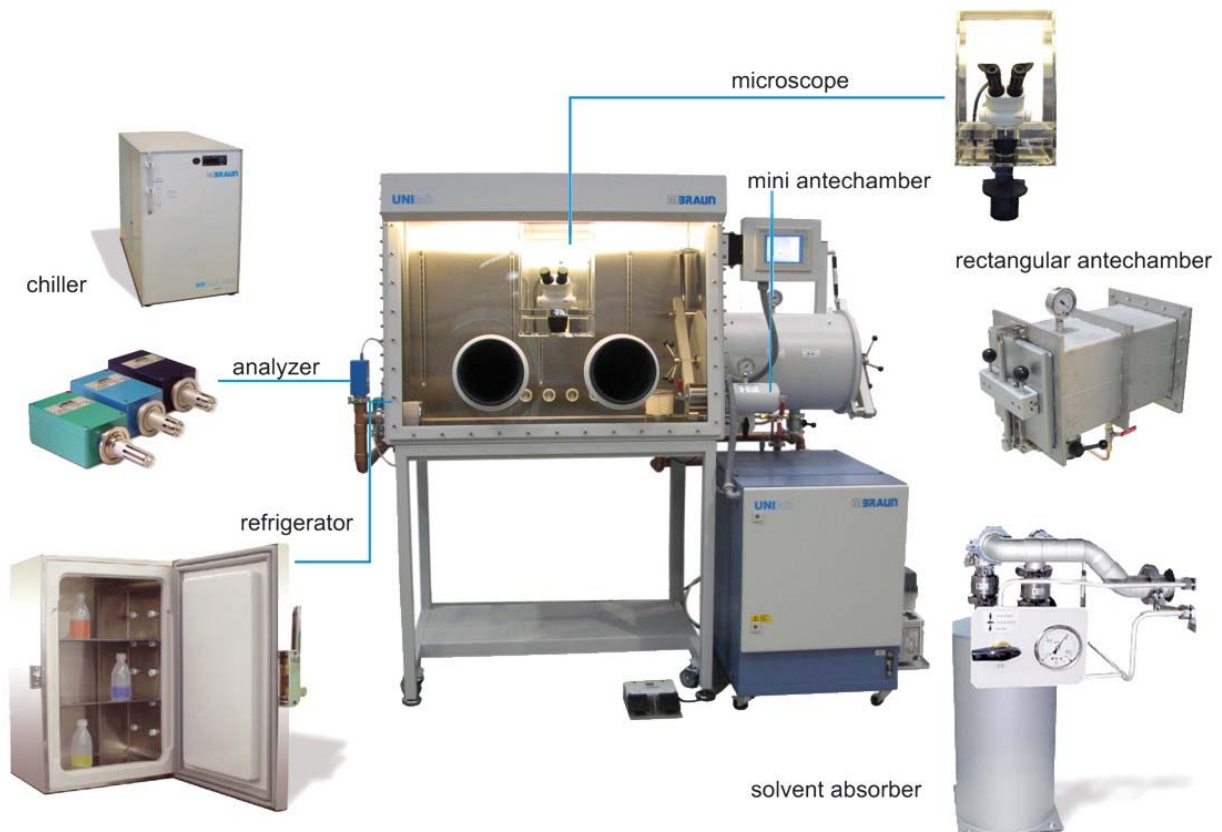


Dimension

The UNILAB system is available in the following box sizes and depth: outer dimensions (mm), weight: 400 kg/550 kg

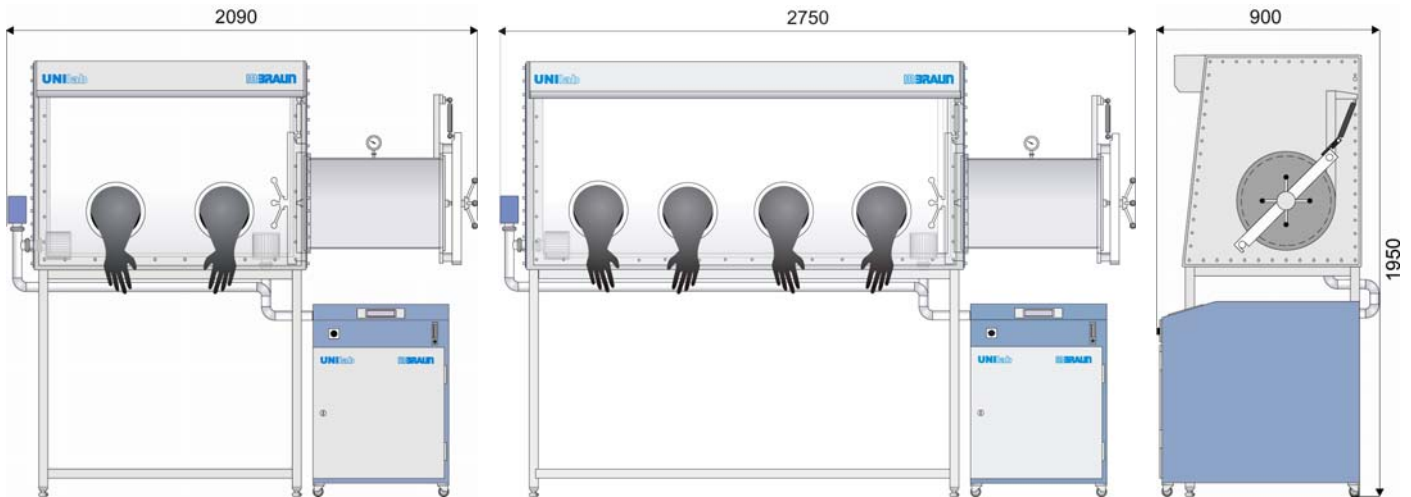

Utilities

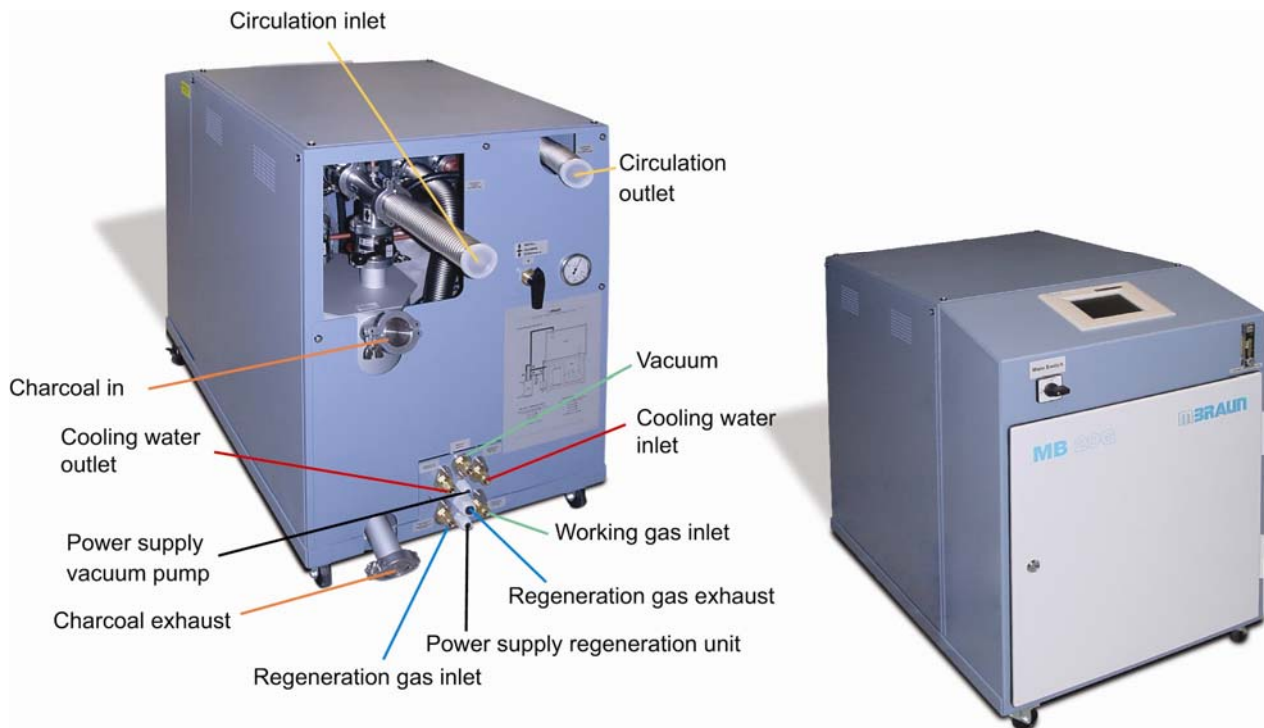


Utilities


Designation	Medium	Pressure (kPa)	Temp. (°C)	Flowrate (l/min)	Connection Ø
Cooling water inlet, opt. use	Water	300	max. 20	2 - 3	8 mm hose ID
Cooling water outlet		50	max. 32		8 mm hose ID
Working gas	N ₂ or Ar 4.8	600		250	Swagelok 10 mm
Regeneration gas	Ar/H ₂ 95/5	30 - 50		20 - 25	Swagelok 10 mm
Regeneration gas exhaust	or N ₂ /H ₂ 95/5				Swagelok 10 mm

Box Volume Table

approx. 0.8 m³

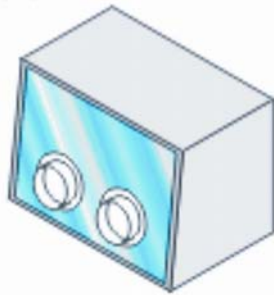

approx. 1.4 m³

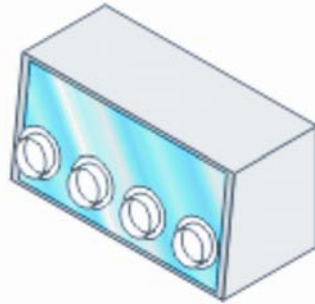

Box depth 780 mm



M. Braun Inertgas-Systeme GmbH Head-Office Germany • Dieselstr. 31, D-85748 Garching • Phone: +49(0) 89-3 26 69-0
Fax: +49(0) 89-3 26 69-105 • E-Mail: info@mbraun.de

M. Braun Inc. USA • 14 Marin Way, Stratham, NH 03885 • Phone: +1-603-773-9333 • Fax: +1-603-773-0008 • E-Mail: info@mbraunusa.com

M. Braun Inertgas Systems (Shanghai) Co., Ltd. China • 828 Xin Jinqiao Road • Pudong Shanghai 201206, P.R.C.
Phone: +86-21-50320257 • Fax +86-21-50320229 • E-Mail: info@mbraunchina.com

M. Braun Service Japan • Yoshikawa building, 3rd floor • 6-32 Honcho, Wako-shi • Saitama 351-0114 • Phone: +81-48-452-6367 • Fax: +81-48-452-6368

Internet www.mbraun.de • www.mbraunusa.com • www.mbraunchina.com